

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
17 June 2004 (17.06.2004)


PCT

(10) International Publication Number  
**WO 2004/050457 A1**

- (51) International Patent Classification<sup>7</sup>: **B62D 13/00 //** A01M 7/00
- (21) International Application Number: PCT/DK2003/000826
- (22) International Filing Date: 2 December 2003 (02.12.2003)
- (25) Filing Language: Danish
- (26) Publication Language: English
- (30) Priority Data:  
PA 2002 01860 2 December 2002 (02.12.2002) DK
- (71) Applicant (for all designated States except US): **HARDI INTERNATIONAL A/S** [DK/DK]; Helgeshøj Allé 38, DK-2630 Taastrup (DK).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **NEJSUM, Lars** [DK/DK]; Trolldager 9, DK-2950 Vedbæk (DK).
- (74) Agent: **ZACCO DENMARK A/S**; Hans Bekkevolds Allé 7, DK-Denmark Hellerup (DK).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT (utility model), PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,

[Continued on next page]

(54) Title: A TRAILER FOR TOWING AFTER A TOWING VEHICLE, A SYSTEM COMPRISING A TRAILER AND A TOWING VEHICLE, AND A METHOD OF STEERING A TRAILER AROUND A TURNING POINT

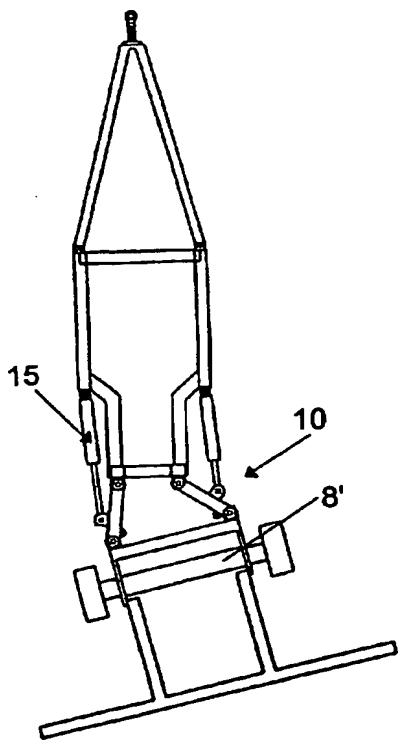

(57) Abstract: The invention relates to trailer (1) for towing after a towing vehicle, said trailer (1) comprising a frame (3) configured for carrying a load and having a front end with a coupling (5) configured for connecting the trailer (1) to the towing vehicle and allowing that the trailer (1) and the towing vehicle are able to assume mutually angular positions during turning about a turning point O; and a rear end. The trailer also has a separate wheel frame (8) that is connected to the frame (3) by means (10) that allow a relative turning of the frame in relation to the wheel frame (8) during turning of the trailer about the turning point, said wheel frame (8) comprising oppositely arranged wheels (4) that support the trailer (1) during the towing and that are arranged at a distance from each other close to a respective longitudinally extending side of the frame (3); and actuator means (15) for producing said relative turning of the frame (3). The invention is characterized in that the connecting means (10) also allow a controlled transversal movement of the frame (3) in a direction towards or away from said turning point (O) simultaneously with said relative turning of the frame (3); and that the trailer (1) comprises actuator means (15) for producing said transversal movement of the frame (3).

WO 2004/050457 A1



SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

**A trailer for towing after a towing vehicle, a system comprising a trailer and a towing vehicle, and a method of steering a trailer around a turning point**

- 5 The present invention relates to a trailer for towing after a towing vehicle as defined in the preamble to claim 1.

Thus, as a starting point the trailer according to the invention comprises a frame configured for carrying a load and having a front end with a coupling  
10 for connecting the trailer to the towing vehicle in such a manner that the trailer and the towing vehicle are able to assume mutual angle positions during turning around a turning point, and a rear end. Besides, the trailer comprises a separate wheel frame that is connected to the frame by means of connecting means that allow a relative turning of the frame in relation to  
15 the wheel frame during said turning around a turning point. This wheel frame comprises oppositely arranged wheels that support the trailer during the towing and are arranged at a distance in relation to each other near a respective longitudinally extending side of the frame. Additionally, the trailer has actuator means for producing said relative turning of the frame. It being  
20 difficult to define the notion of actual parallel longitudinally extending sides of the frame, said longitudinally extending sides can be perceived as areas situated to each side of a longitudinally extending line of symmetry for the frame that extends from the front end of the frame to the rear end of the frame.

25

Trailers of this type are already known from eg BE 473 218 and EP 350 008. It is a common feature of these trailers that it is possible to actively influence and modify the movement of the trailer, when the trailer is moved through curves by means of the towing vehicle.

30

For instance, there may be a need for performing such influence when a towing vehicle and a trailer are to move along parallel tracks on a field and when, to this end, the towing vehicle and the trailer have to turn at the end of the field. In particular in that context it is important that the wheels of the trailer do not interfere with an extra track on the field, which may harm the crop, but rather that the wheels of the trailer accurately follow the wheel tracks that were initially established in the field or generated during driving by the preceding towing vehicle. The mutual spacing transversally to the driving direction between the wheels on the trailer is, of course, as a starting point selected to be in correspondence with the corresponding space between the wheels of the towing vehicle, thereby avoiding the generation of an additional wheel track during straight-ahead operation. However, during the turning an active influence has to be exerted on the trailer to avoid generation of additional wheel tracks.

By the construction of such trailers it is necessary to take into account the stability problems that may arise, in particular in case the trailer is to carry a high load. The problems are further exacerbated if the load is constituted by a high tank containing liquids that may splash to the effect that the risk of the trailer toppling on its side during the turning is further increased. This problem is of particular relevance when the trailer constitutes a field sprayer and a fold boom sprayer.

Since the distance between the wheels on the trailer is, as mentioned, determined by the corresponding distance between the wheels of the towing vehicle, the system chosen for influencing the turning of the trailer around the turning point may impose limitations to the options available to the constructor when the shape of the frame is to be determined. This will also be the case inasmuch as the load of the trailer is concerned, including eg the configuration of the liquid tank, where a field sprayer may be concerned that constitutes the load. The liquid tank and the frame must thus be shaped

- specifically for allowing space for the movement of the wheels during turning of the wheel frame. It follows from this that the tank of such trailers must be made even narrower at the bottom than is shown in Figure 1 of EP 862 855, where the wheel axles of the trailer are fixedly mounted. In order to
- 5 compensate for such reduction in dimensions at the bottom of the tank, the constructor will often strive to increase the height of the liquid tank, which may, however, lead to quite serious problems with stability, in particular during turning around a turning point.
- 10 It is an object of the invention to provide a trailer that can be steered though curves and that reduces the limitations that may be imposed on the shape of the load. This is accomplished as featured in claim 1 in that the connecting means mentioned above are configured such that they also allow a controlled, transversal movement of the frame in relation to the wheel frame
- 15 in a direction towards or away from said turning point, ie transversally to the direction of driving, simultaneously with said relative turning of the wheel frame taking place; and that the trailer comprises actuator means for producing said transversal movement of the frame. It will be understood that the trailer may be provided with more than one wheel frame of the type
- 20 described, albeit at present a configuration with one wheel frame is preferred.

Advantageous embodiments will appear from the dependent claims. The trailer can thus be an integral part of a tool, such as an agricultural implement, where the load is a receptacle for spraying liquid that extends

25 very closely to the rearmost end of the trailer, the wheels being arranged at the rear end of the trailer, opposite the coupling. The connecting means may in a simple manner be configured as at least two arms that are pivotally connected to the frame and the wheel frame, respectively, and that constitute a trapezoidal mechanism for controlling the movement of the wheel frame

30 along a curve track.

The invention also relates to a system comprising a combination of the trailer and a towing vehicle and a method of steering a trailer through curves.

In the following, the invention will be explained in further detail with reference  
5 to the drawing, wherein

Figures 1a and 1b show how the wheels on a trailer can be steered when the trailer is towed after a towing vehicle and when it is desired that the trailer should follow the track of the towing vehicle;

10

Figures 2a, 2b and 2c show respective positions for the trailer according to the invention during movements through curves having different radii; and

Figure 3 shows an alternative embodiment of the trailer, wherein the wheels  
15 have a further degree of freedom.

In Figures 1a and 1b, two solutions known from BE 473 218 are represented for controlling the wheels of a trailer and it will appear how, in order to ensure that the wheel tracks of the trailer follow the wheel tracks of the towing  
20 vehicle, it is necessary to see to it that the wheels on the wheel frame are at any time perpendicular to a straight line that extends to the turning point O.

By the present invention the latter condition must also be complied with in those cases where it is desired that the wheel tracks of the trailer are to  
25 follow the wheel tracks of the towing vehicle during turning around a turning point O, and it can be ensured by providing, either on the towing vehicle or on the trailer, a control unit with a memory that will, via actuator means, produce a predetermined setting of the frame in relation to the wheel frame, as will be explained below.

30

Figures 2a, 2b and 2c show a trailer 1 according to the invention. Preferably the trailer 1 is connected directly to the towing hook on the towing vehicle via a coupling in the form of a tow ring at the front end of the frame 3. The wheel frame 8 of the trailer 1 that carries the wheels that support the trailer is  
5 movably mounted on the frame 3 at the rear end thereof, in such a manner that the frame may – in relation to the wheel frame 8 – be forced to turn and simultaneously forced to swing sideways and outwards transversally to the direction of driving towards or away from the turning point O in relation to the wheel frame 8. When the combined vehicle drives straight ahead, the wheels  
10 4 are, of course, parallel with the wheels (not shown) of the towing vehicle, and the wheel frame 8 extends in extension of the frame 3 behind same. When the towing vehicle turns and it is thus time to swing around a turning point O, the frame 3 will be conveyed to the side, while simultaneously the frame turns in relation to the wheel frame 8.

15

In order to obtain this translatory and rotary movement of the frame 3, the frame 3 is preferably connected to the wheel frame 8 via connecting means  
10 in the form of a trapezoidal connection comprising two arms of equal lengths 10', 10'', each of which is pivotally connected to the frame 3 and the  
20 wheel frame 8, respectively. Hereby the frame 3 is controlled by the particular pattern of movement that follows from the freedom of movement of the trapezoidal connection. Figure 2a shows that the arms 10', 10'' converge in a direction towards the frame 3, but it may very well be an option to have an alternative configuration, wherein the arms 10', 10'' converge in a direction  
25 towards the wheel frame 8. It may in some cases entail a favourable increase of the trailer stability during turning.

When the towing vehicle starts to move, actuator means 15 in the form of eg hydraulic cylinders 15', 15'' control the movement of the frame 3, to the effect  
30 that the frame 3 adapts to the desired position. The control of the hydraulic

cylinders 15', 15" may occur in correspondence with a detected angle between the towing vehicle and the wheel frame 8.

When, in particular in connection with field sprayers, where the frame 3 carries a large liquid tank, it is a point of interest to accomplish a swinging of the frame 3 and not merely a turning of the wheel frame 8 or of the axle 8' of the wheels 4, it is due to the fact that such turning on its own may limit the dimensions of the tank transversally to the frame 3 at the bottom at the wheels 8 and on the connecting rods (19) between the wheel frame 8 and the beam 20, as the wheels may bump against the tank and/or the connecting bars 19.

It is preferred that the axes of rotation of the wheels 4 in relation to the wheel frame 8 are fixed as shown in Figures 2a-2c, and that thus the freedom of movement resides primarily in the movability of the wheel frame 8 in relation to the frame 3.

In some situations, as shown specifically in Figure 3 it may be expedient to build in a system for turning the wheels 4 in relation to the wheel frame 8, eg if the remaining constructive elements on the frame 3 prevent a sufficiently large slewing of the wheel frame 8. This turning movement may be generated eg by means of a system of actuator means as shown by the reference numeral 15'', in addition to the actuator means 15', 15" (not shown in Figure 3).

In Figures 2a-c and Figure 3, the wheel frame 8 is shown with an elongate beam 20 at the rear. This beam 20 may in a convenient manner support a boom sprayer optionally with an associated air blower device, as shown in WO 95/16347.



Claims

1. A trailer (1) for towing after a towing vehicle, said trailer (1) comprising:

5 a) a frame (3) configured for carrying a load and having:

10 i) a front end with a coupling (5) configured for connecting the trailer (1) to the towing vehicle and allowing that the trailer (1) and the towing vehicle are able to assume mutually angular positions during turning about a turning point O; and

ii) a rear end;

15 b) a separate wheel frame (8) that is connected to the frame (3) by means of connecting means (10) that allow a relative turning of the frame (3) in relation to the wheel frame (8) during said turning about a turning point (O), said wheel frame (8) comprising oppositely arranged wheels (4) that support the trailer during the towing and that are arranged at a distance from each other close to a respective longitudinally extending side of the frame (3);

20

and

c) actuator means (15) for producing said relative turning of the frame (3);

25 **characterised in**

- that the connecting means (10) also allow a controlled transversal movement of the frame (3) in relation to the wheel frame (8) in a direction towards or away from said turning point (O) simultaneously  
30 with said relative turning of the frame (3); and

- that the trailer (1) comprises actuator means (15) for producing said transversal movement of the frame (3).

2. A trailer according to claim 1, **characterised in** that the wheels (4) are  
5 arranged at the rear end of the trailer (1) opposite the coupling (5).

3. A trailer according to claim 1 or 2, **characterised in** that the wheel frame  
(8) is arranged behind the rear end of the frame (3) in order to thus constitute  
the rear end of the trailer (1).

10

4. A trailer according to any one of the preceding claims, **characterised in**  
that the wheel frame (8) carries an agricultural implement, in particular a fold  
boom sprayer (20).

15 5. A trailer according to any one of the preceding claims, **characterised in**  
that the load is a liquid container.

6. A trailer according to claim 5, **characterised in** that the container extends  
until or beyond the rear end of the frame (3); and that the wheels (4) are  
20 arranged at the rear end of the trailer (1) opposite the coupling (5).

7. A trailer according to any one of the preceding claims, **characterised in**  
that said wheels (4) are also arranged for turning about a vertical or  
essentially vertical axis in relation to the wheel frame (8); and that actuator  
25 means (15'') are coupled to the wheel frame (8) to produce this turning.

8. A trailer according to any one of the preceding claims, **characterised in**  
that the connecting means (10) are constituted of at least two arms (10', 10'')  
that are pivotally connected to the frame (3) and the wheel frame (8),  
30 respectively, and that constitute a trapezoidal mechanism for controlling the

movement of the frame (3) along a curve track in relation to the wheel frame (8).

9. A trailer according to any one of the preceding claims 1-7, **characterised**  
5    **in** that the connecting means (10) comprise a journaling for the wheel frame (8) with slide steering for controlling the movement of the frame (3) along a curve line in relation to the wheel frame (8).
10. A trailer according to any one of the preceding claims, **characterised in**  
10    a control unit with a memory that produces, via the actuator means (15), a predetermined fixed setting of the frame (3) in relation to the wheel frame (8) in correspondence with the angle position between the towing vehicle and the wheel frame (8).
- 15    11. A trailer according to any one of the preceding claims, **characterised in** that the actuator means (15) are connected to the frame (3), to the wheel frame (8) and/or to the connecting means (10).
- 20    12. A system comprising a towing vehicle and a trailer (1) according to any one of the preceding claims 1-11, **characterised in** a control unit with a memory that produces, via the actuator means (15), a predetermined fixed setting of the frame (3) in relation to the wheel frame (8) in correspondence with the angle position between the towing vehicle and the wheel frame (8).
- 25    13. A system according to claim 12, **characterised in** that the mutual distances transversal to the direction of driving between the wheels of the towing vehicle and between the wheels (4) of the trailer (1) are essentially identical.
- 30    14. A system according to claim 12 or 13, **characterised in** that the control unit is configured for ensuring that at least one set of wheels on the towing

vehicle and the wheels (4) of the trailer (1) move(s) along the same curve line during turning about a turning point O.

15 A method of steering a trailer (1) around a turning point (O), said trailer being towed by a towing vehicle, wherein the trailer (1) comprises:

a) a frame (3) configured for carrying a load and having:

10 i) a front end with a coupling (5) configured for connecting the trailer (1) to the towing vehicle and allowing that the trailer (1) and the towing vehicle are able to assume mutually angular positions during turning about a turning point O; and

ii) a rear end;

15 b) a separate wheel frame (8) that is connected to the frame (3) by means of connecting means (10) that allow a relative turning of the frame (3) in relation to the wheel frame (8) during the steering, said wheel frame (8) comprising oppositely arranged wheels (4) that support the trailer (1) during the towing and that are arranged at a distance from each other close to a respective  
20 longitudinally extending side of the frame (3);

and

c) actuator means (15) for producing said relative turning of the frame (3);

25

**characterised in**

that, by means of actuator means (15), a transversal movement of the frame (3) is produced in relation to the wheel frame (8) in a direction towards or  
30 away from said turning point (O) simultaneously with a relative turning of the frame (3) in relation to the wheel frame (8).



2/3

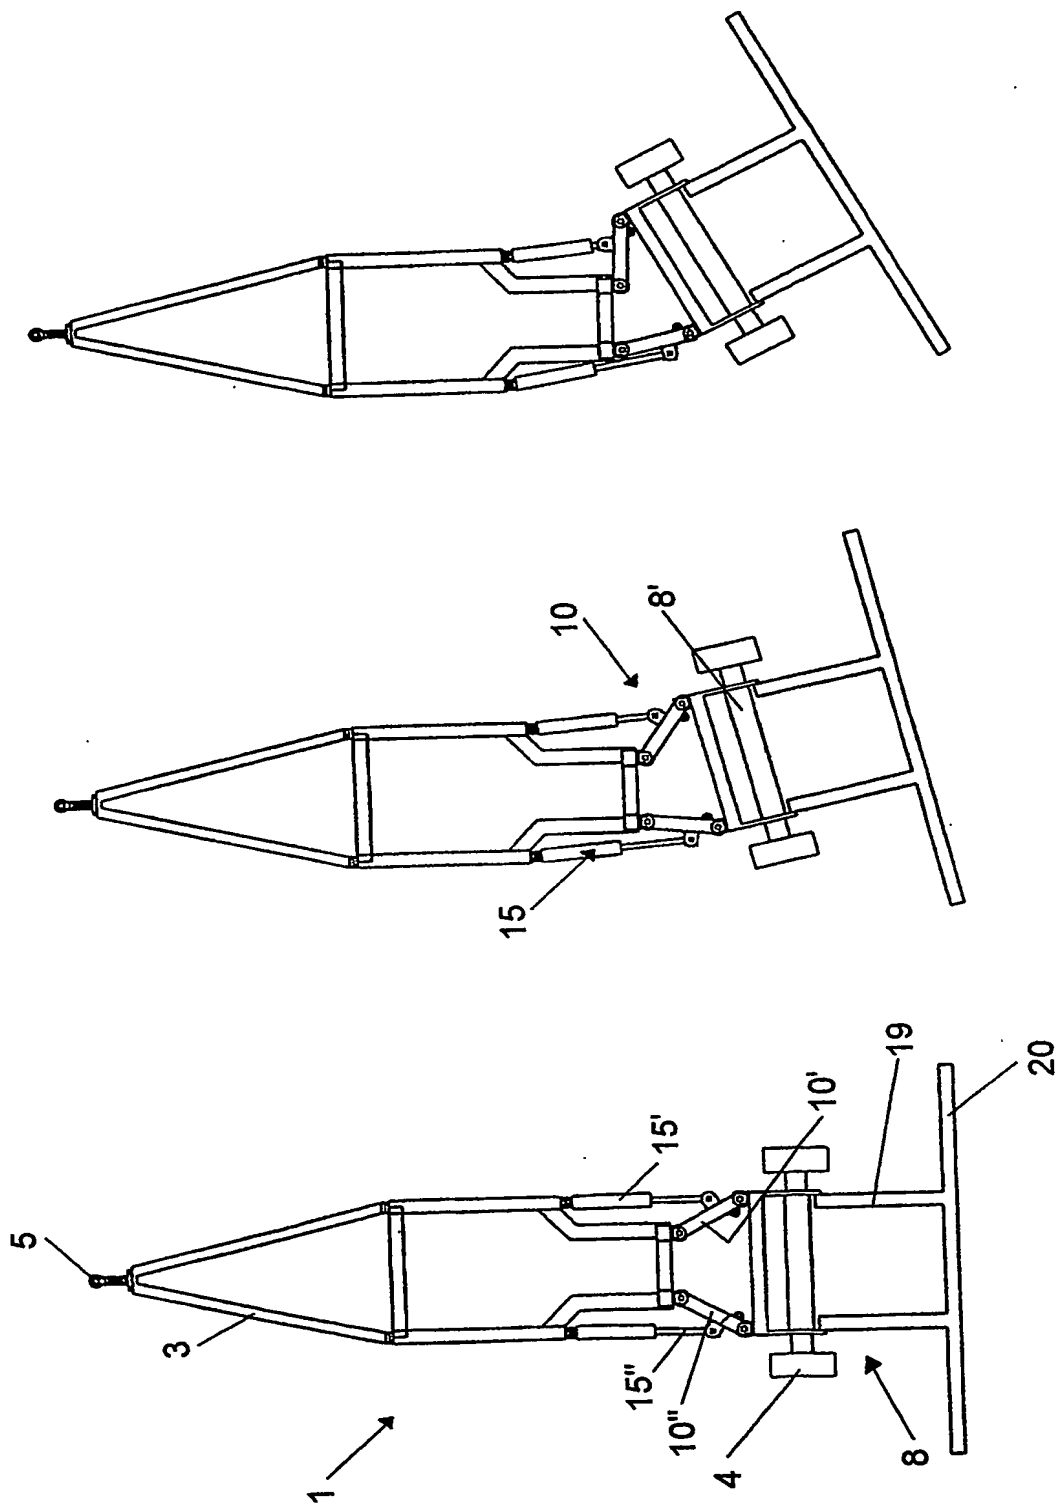


Fig. 2c

Fig. 2b

Fig. 2a

3/3

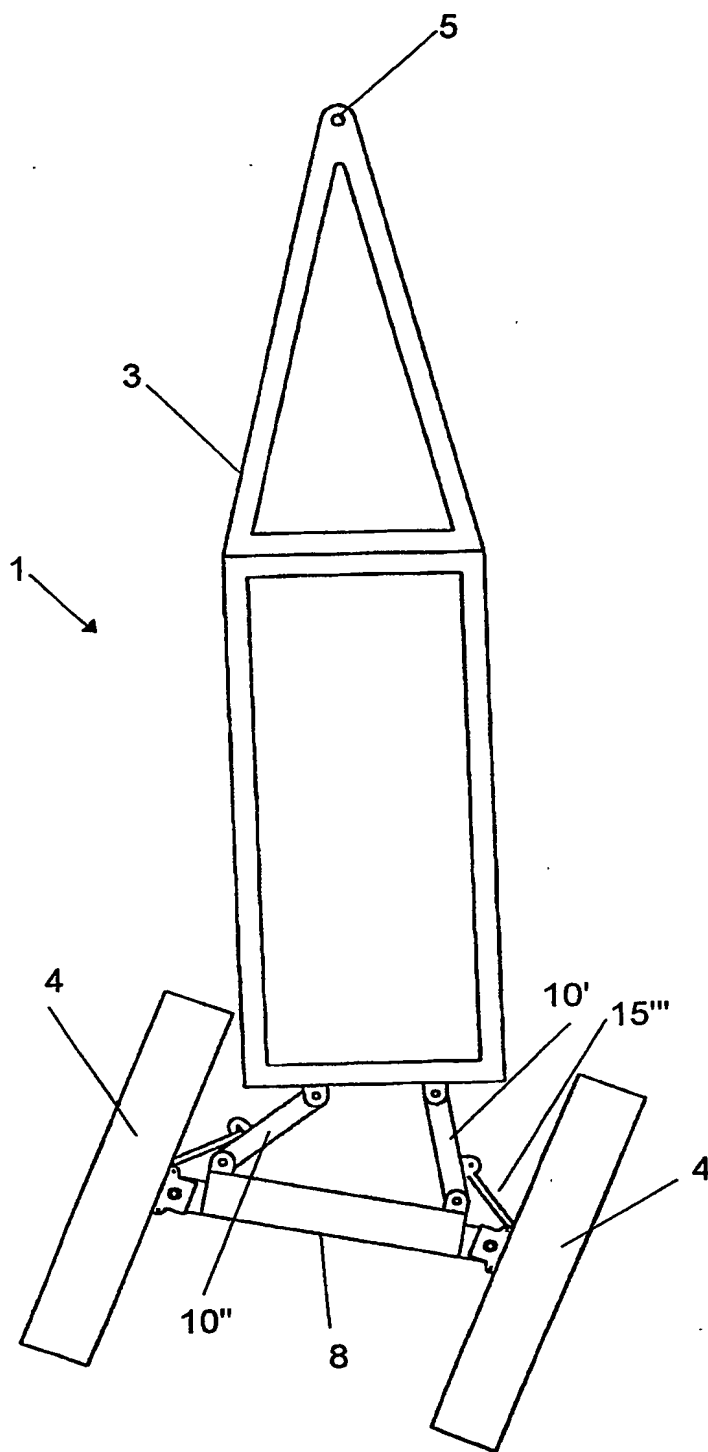


Fig. 3

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK 03/00826

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 B62D13/00 //A01M7/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B62D A01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 351 408 A (MOLL HANS) 28 September 1982 (1982-09-28) the whole document	1-15
A	GB 821 330 A (JOHN PHIL FELLABAUM) 7 October 1959 (1959-10-07) the whole document	1-15
A	DE 28 44 684 A (MUECKEL HEINZ) 24 April 1980 (1980-04-24) the whole document	1-15
A	FR 1 526 035 A (MESSIER FA) 24 May 1968 (1968-05-24) the whole document	1-15

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance  
 "E" earlier document but published on or after the international filing date  
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
 "O" document referring to an oral disclosure, use, exhibition or other means  
 "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art  
 "&" document member of the same patent family

Date of the actual completion of the international search

26 February 2004

Date of mailing of the international search report

11.03.2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
 Fax: (+31-70) 340-3016

Authorized officer

HANS NORDSTRÖM /ELY



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK 03/00826

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4351408	A	28-09-1982	DE 2852613 A1	12-06-1980
			GB 2038740 A ,B	30-07-1980
			IT 1120130 B	19-03-1986
			SE 441176 B	16-09-1985
			SE 7909967 A	06-06-1980
-----				
GB 821330	A	07-10-1959	BE 548718 A	
			DE 1025733 B	06-03-1958
-----				
DE 2844684	A	24-04-1980	DE 2844684 A1	24-04-1980
-----				
FR 1526035	A	24-05-1968	NONE	
-----				